


Hand-drawn single-line diagram of a power distribution system. A main horizontal busbar is connected to a vertical busbar labeled "DZ10-250/330 120 A". Above this vertical busbar is a cable labeled "VV29-1-(3x50+1x16)". The main horizontal busbar has 30 vertical branches, each labeled with a cable size and a device number. The labels are: 15A, 15A, 20A. Below the busbar, the device numbers are listed: N1a, N2b, N3c, N4a, N5b, N6c, N7a, N8b, N9c, N10a, N11b, N12c, N13a, N14b, N15c, N16a, N17b, N18c, N19a, N20b, N21c, N22a, N23b, N24c, N25a, N26b, N27c, N28a, N29b, N30c.

箱体厚 240

说明

1. 根据建设单位要求将品空调电流插座及部分照明线路改动。
2. 照明配电箱按本图要求订货。插座箱均为 CXT-1C-1×4-4 型暗装箱。
3. 反风机控制箱主开关改接为 DZ10-100/330 30A, 配电回路增设两支 DZ5-50 25A 自动开关向空调机供电。
4. 图中灯具为原有灯具不变。虚线示原有穿线管, 按本图换线, 导线型号未注明时均为 BV-105 (2.5 mm²) 耐热塑料线。
5. 图中实线为新增线路, 均为 BV (6 mm²)。空调电流线路在展厅部分沿网架敷设, 引下至插座的垂直部分沿墙暗敷。透地坑插座箱线路沿围栏内坑边暗敷。
6. 三相四线插座为 380V 25A 暗插座。其余为 250V 15A 单相三极带开关暗插座。装高均为 1.6 m。
7. 原有未画出的无线路均不变, 接至配电箱的回路编号不变。
8. 接零保护线均利用敷线钢管在配电箱处接工作零线。
9. 透地坑内及屋顶部予留照明电流, 在图中要尽量注意, 尽量将负荷均布在三相上。
10. 将图 1-2 交非控制模流器换成西宝永明灯具, 并装三只于该处。

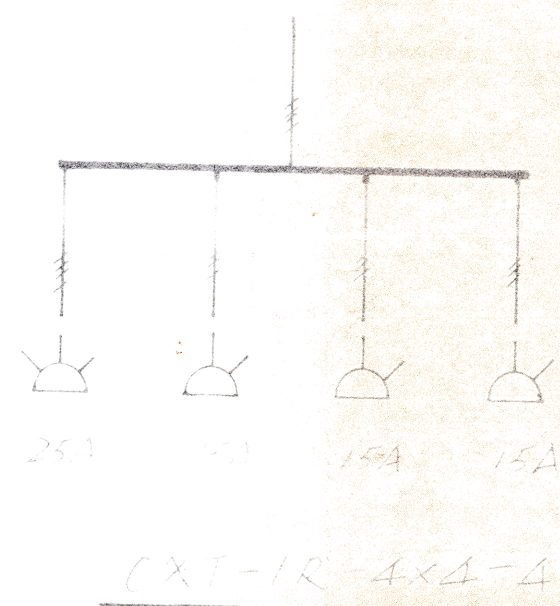

陕西省建筑设计院

工程名称	秦俑博物馆
地址	三义坡墓坑

说明及配电系统图

设计号 86034

图 别 施

日期 1991.6.24